

EC Use and Maintenance Manual

Scissor lifting platform		
Wider		
Model	Version	
WD-003	ELECTRO-HYDRAULIC PUMP	
Duo 1000 Model	Version	
DL-003	ELECTRO-HYDRAULIC PUMP	



Bike-Lift EUROPE s.r.l.

via Don Milani, 40/42

43012 Sanguinaro di Fontanellato (PARMA) – Italy

Website: www.bikelifteurope.it
E-mail: info@bikelifteurope.it





Summary

1		Information section	4
	1.1	Preface	4
	1.2	Prohibitions	5
	1.3	Warranty	5
	1.3.	1 Warranty conditions	5
	1.3.2	2 Insurance	5
	1.4	Manufacturer identification	6
	1.5	Technical assistance and spare parts	6
	1.6	EC Declaration of conformity	7
	1.7	Normative references	8
	1.8	Key	9
2	Ma	chine description	10
	2.1	Machine name	
	2.2	Machine identification	10
	2.3	Machine description	11
	2.4	Intended use	12
	2.5	Technical specifications	13
	2.5.	1 WIDER 1000	13
	2.5.2	2 DUO 1000	14
3	Safe	ety section	15
	3.1	Environmental working values	
	3.2	Sound level	15
	3.3	Residual risks	15
	3.4	Operator protections	16
	3.5	Safety systems	16
	3.6	Pictograms	18
4	Tra	nsport and handling section	19
	4.1	Transport, handling and storage	
	4.2	Packaging and transport	19
	4.3	Unloading and handling	19
	4.4	Receipt and check	20
	4.5	Storage	20





5	− 	F Inst	allation section	21
	5.1	Pow	ver	21
	5.2	Put	ting into service	22
6	Dis	smant	tling/scrapping section	23
	6.1		mantling	
	6.2	Med	chanical dismantling	23
	6.3	Scra	apping	23
7	QQ	eratio	on section	24
	7.1		ding operations	
	7.2	Unle	oading operations	25
	7.3	Lifti	ing types	26
	7.3	.1	Control unit	26
8	Ma	ainter	nance section	27
	8.1		rication	
	8.2	Blee	eding of the hydraulic circuit	27
	8.3	Pist	on replacement	28
	8.4	Clea	aning	29
	8.4	.1	Initial cleaning	29
	8.4	.2	General cleaning of the machine	29
	8.4	.3	Cleaning of the work areas	30
	8.5	Pro	blems and remedies	30
9	Ac	cesso	ries	33 💝
SF			- TECHNICAL DRAWINGS	
	9.1	WIE	DER 1000	34
	9.2	DUC	O 1000	35







1 • Information section

1.1 Preface

The EC Use and Maintenance Manual is a document issued by Bike-Lift Europe s.r.l. as an integral part of the Machine.

The purpose of this publication is to provide the operator with efficient and safe instructions regarding the use and maintenance.



This manual must be read before starting any operation regarding the installation, use, maintenance and putting out of service of the machine; therefore it is necessary to be kept intact over time.

In order to properly store the Manual it is recommended to:

- Use the manual without deteriorating it;
- Do not remove, add, change or rewrite any part of the Manual; any modifications must be made only by Bike-Lift-Europe s.r.l .;
- Keep the Manual in areas protected against humidity in order not to compromise its durability over time;
- Deliver the Manual to any other user or subsequent owner of the Machine.



Workers in charge of using this machine must have all the necessary information and must receive proper training.

The manual and relative documentation are confidential by law with the prohibition of reproduction or transmission to third parties without receiving the explicit authorization of the manufacturer.

As a partial exception to the above mentioned, a copy of this Manual kept in the vicinity of the Machine is allowed for prompt reference, in case the original document is stored in a different place, in order to guarantee better keeping over time.

Drawings, data and specifications contained in this manual can be modified at any time by the company, without prior notice.

In case of significant changes of the machine due to the installation of new parts, Bike-Lift Europe s.r.l. will compile an updated Manual that will be sent to the Customer together with the purchased part.







1.2 Prohibitions

The installation, use, maintenance and putting out of service of the device with means, objects, actions and anything else not provided for in this manual is considered improper and therefore the manufacturer declines all responsibility for the consequences that may occur regarding people, animals and objects.



It is expressly FORBIDDEN the use of the Machine by Operators who do not know the regulation and procedures described in the Manual and by unauthorized people (hereinafter referred to as "non-operators").

It is also forbidden the use of the machine by children and the non-operators or children must not stand near the machine during all phases of the machine's life.

The putting out of service of the protection systems or anything else provided by the manufacturer to protect the operators is the sole responsibility of the Purchaser or the Machine's User.

Any mechanical, electrical or functional change of the Machine (not provided for in this Manual) regarding the control systems, the logic of controls, the circuits present and the safety systems is prohibited without the prior written authorization of the manufacturer.

1.3 Warranty

Bike-Lift Europe s.r.l. will not be held responsible for inconveniences, breakages, accidents, etc. due to lack of knowledge or failure to apply the procedures specified in this Manual. The same applies to the execution of modifications, changes or for the installation of accessories not previously authorized.

1.3.1 Warranty conditions

Bike-Lift --Europe s.r.l guarantees its products for 12 months, except for the commercial components that are guaranteed by the manufacturers.

All worn parts are excluded from the warranty.

The warranty is limited to the replacement, ex-works Bike-Lift Europe s.r.l, of those parts that are recognized as defective by Bike-Lift Europe s.r.l due to a material or manufacturing defect and do not include labor or travel expenses required for their replacement;

The recognition of the warranty is void if the anomaly is due to an inappropriate use of the product, if the installation was not carried out according to the provisions of the company or if non-genuine parts were installed.

It also becomes void if the product has been submitted to performances exceeding those indicated by Bike-Lift Europe s.r.l.

1.3.2 Insurance

All Bike-Lift-Europe s.r.l products are insured with an RCP policy with a price ceiling of € 3.000.000. Damages caused by negligence or tampering are excluded.









1.4 Manufacturer identification

Bike-Lift EUROPE s.r.l. via Don Milani, 40/42, 43012 Sanguinaro di Fontanellato (PARMA) – Italy



Website: www.bikelifteurope.it



E-mail: info@bikelifteurope.it



Tel: 0039-0521-827091



Fax: 0039-0521-827064

1.5 Technical assistance and spare parts

To order spare parts, it is recommended to specify exactly the following data:

- Model and serial number of the machine;
- Code number and part name;
- Required quantity;
- Shipping means, address and telephone number;

For replacements use only genuine spare parts.

Do not wait until the components are completely worn before replacing them.



CAUTION: THE RECIPIENT WILL BE CHARGED FOR THE REPLACEMENT TOGETHER WITH THE SHIPPING COSTS .

We recommend that you always contact Bike-Lift Europe s.r.l. for all those Assistance and maintenance operations that are not described or indicated in this Manual.







1.6 EC Declaration of conformity

(Annex II, part 1, section A of directive 2006/42/EC)

Manufacturer:

Company: Bike-Lift EUROPE S.r.I.

Address: Via Don Milani, 40/42 - 43012 Sanguinaro di Fontanellato (PR) - Italy

Declares under its sole responsibility that the machine:

Designation: WIDER 1000 Lifting platform/DUO 1000 Lifting platform

Model: WD-003/DL-003

Serial number:

Year:

Function: Lifting of motor vehicles for vehicle maintenance operations

Complies with the essential safety requirements of the following Directives:

- 2006/42/EC Machineries Directive
- 2014/30/EU Electromagnetic Compatibility (EMC)

Complies with the requirements of the following Harmonized Standards:

- **UNI EN ISO 12100:2010** Safety of machinery General principles of design Risk assessment and risk reduction
- UNI EN 1493:2010 Lifts for vehicles

Person authorized to prepare the Technical Sheet:

Name: Alessandro Tozzi

Address: Via Don Milani, 40/42 - 43012 Sanguinaro di

Fontanellato (PR) - Italy



Alessandro Tozzi Legal Representative







1.7 Normative references

The machine is identified by the CE marking drawn up according to the specifications of the Machinery Directive 2006/42/EC and subsequent updates.

Reference	Title
2006/42/EC	Machinery Safety Directive
2014/30/EC	Electromagnetic Compatibility Directive (EMC)
2014/35/EU	Low Voltage Directive (LVD)
EN ISO 12100 (2010)	Safety of machinery - General principles of design - Risk assessment and risk reduction.
UNI EN ISO 13857:2008	Safety of machinery - Minimum spaces to avoid the crushing of body parts.
UNI EN ISO 13850 (2008)	Safety of machinery - Emergency shutdown - Design principles
EN 1493 (2010)	European standard on vehicle lifting platforms
EN 60204-1 (2016)	Directive on the state of the art for the design and construction of the electrical equipment of machines, including the switchboard connected to the machines.
UNI EN ISO 4413:2012	Safety of machinery - Safety requirements related to systems and their components for hydraulic fluid and pneumatic transmissions - Hydraulic fluid
UNI 1285-68	Calculation of metal pipes resistance subject to internal pressure







1.8 Key

LIFTING PLATFORM: electro-hydraulic scissor lifting system for the maintenance and repair of quads and small 4-wheel vehicles (Wider 1000 is also used for motorcycles). The specific identification of the lifting platform is indicated on the cover.

OPERATOR: In compliance with Directive 2006/42/EC and subsequent updates, it is specified that the term "operator" means the person (s) in charge of installing, operating, adjusting and cleaning the lifting platform. The maintenance and repair operations of the lifting platform are the responsibility of competent personnel.

SYMBOLS	MEANING
	Yellow triangle pictogram generally indicates a Warning /Risk, e.g. risk of high temperatures, risk of crushing the hands,
0	BLUE round pictogram generally indicates an Obligation, for example the obligation to wear certain PPE (goggles,) or the Obligation to read the User Manual.
0	Round red Prohibition pictogram indicates in general a Prohibition, for example, person access prohibition, prohibition of hand access while the vehicle is moving.
	Indicates that the operation can be performed by specialized personnel authorized by the Employer.
R	Particular importance indication that requires attention.
(3)	Specifies an operation that can only be performed by trained personnel, or after having read and consulted specific operating instructions.





2 Machine description

2.1 Machine name

Scissor lifting platform for the maintenance and repair of quads (and motorcycles for Wider 1000) with a maximum capacity of 1000 kg.

The movement of this Bike Lift Europe s.r.l lifting platform takes place through an electrohydraulic system.

This manual refers to the model of lifting platform indicated on the cover

2.2 Machine identification

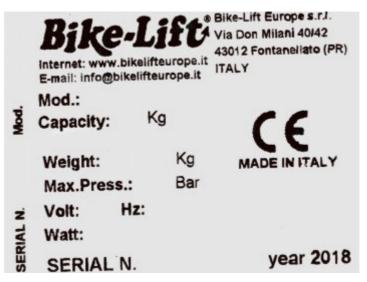


Figure 1 - Example of a plate affixed to the machine

The identification data of the machine are indicated on the placed on the structure and shown in the attached declaration of conformity.

Refer to these details for ordering spare parts and for any kind of contact with the manufacturer

It is absolutely forbidden for the user to remove or alter this plate Any modification or removal of the plate will void any warranty.

The machines can be subject to updates or small aesthetic changes and therefore have different details than those shown, without prejudice to the descriptions and procedures contained by this Manual.





2.3 Machine description

The machine is a suitable equipment to support quads (and motorcycles for Wider 1000) during the maintenance and repair phase in a comfortable and safe way. The basic parts of the lifting platform (see Figure 2) are:


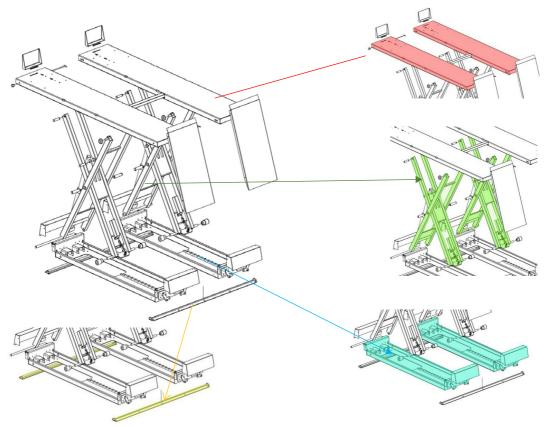


Figure 2 — Model of a lifting platform

- two elevating work platforms (red);
- two bases that can be anchored to the ground (blue);
- two scissor lifting systems consisting of two crossed X-shaped legs (green) handled by a hydraulic cylinder equipped with a parachute valve;
- two side sliding platforms for the Wider 1000 model (yellow).

The fall protection system (shown in orange in the following figure) consists of:

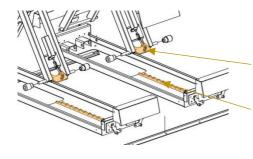

a mobile anchoring bar with automatic coupling that prevents the accidental descent of the mobile surface.

a mechanical safety system consisting of two toothed bars firmly welded to the base





2.4 Intended use



Disseminate the instructions described in this chapter to all personnel involved in the preparation and use of the machine.

The machine is intended for lifting quads (and Wider 1000 also for motorcycles) for maintenance purposes.



The machine has been designed and built for the specified use; a different use and non-compliance with the technical parameters set by the Manufacturer may be dangerous for the operators.

It can be used in the mechanical motorcycles repair shops both for the mechanical part and for the bodywork.



Any other use different from the one indicated is to be considered as not planned and may cause damage to the machine and Operators. It is therefore **FORBIDDEN**.



The machine must always be operated by only one Operator.

The Operator must always work in proper lighting conditions and wear clothes and protections appropriate to the task performed (typical activity of mechanical workshop)

The working position of the operator during the ascent and descent phases is in the area around the machine at the safety distance allowed by the cable length of the control panel.



It is absolutely forbidden to lift motorcycles while leaning on the side kickstand Do not try to lift motor vehicles weighing more than the maximum capacity of the platform.

Do not stand under the vehicle during maintenance phases.





2.5 Technical specifications

2.5.1 WIDER 1000

(see exploded diagram attached to this manual)

WIDER 1000 VERTICAL SCISSOR LIFTING PLATFORM		
PARAMETER	VALUE	
Maximum bearing	1000 kg	
Maximum height	130 cm	
Minimum height	20 cm	
Safety positions number	12	
Length	230 cm	
Lifting surface sizes closed	84x230 cm	
Lifting surface sizes open	150x230 cm	
Platform size	40x150 cm	
Ascent ramp size	82x40,5 cm	
Total space of the lift	240x100 cm	
Weight	300 kg	

The following additional data are available depending on the type of handling:

2.5.1.1 WIDER 1000 – WD-003

ELECTRO-HYDRAULIC CONTROL UNIT		
PARAMETER	VALUE	
	230Volt- 50Hz Europe	
Available power supplies	200Volt-50/60Hz Japan	
	110Volt-60Hz USA	
Power	1,1 kW	
Available controls	Series button panel	







2.5.2 DUO 1000

(see exploded diagram attached to this manual)

DUO 1000 VERTICAL SCISSOR LIFTING PLATFORM	
PARAMETER	VALUE
Maximum bearing	1000 kg
Maximum height	130 cm
Minimum height	19 cm
Safety positions number	12
Length	210 cm
Ascent ramp size	62x44,5 cm
Total space of the lift	220x135 cm
Weight	270 kg

The following additional data are available depending on the type of handling:

2.5.2.1 DUO 1000 – DL-003

ELECTRO-HYDRAULIC CONTROL UNIT		
PARAMETER	VALUE	
	230Volt50Hz Europe	
Available power supplies	200Volt-50/60Hz Japan	
	110Volt-60Hz USA	
Power	1,1 kW	
Available controls	Series button panel	





3 🛕 Safety section

3.1 Environmental working values

The use environment of the machine must be well lit, must not present explosion hazards of any kind and must be protected from atmospheric precipitations.

The machine works properly within the following values:

- Ambient temperature between 5° and 40° C;
- Ambient humidity between 30% and 90% without condensation;

STORAGE: if the machine has been unpacked, store it in a closed space protected from bad weather conditions.

3.2 Sound level

During the normal conditions of use some measurements were made at the workplace and around the machine at a distance of 1 m and at 1.6 m height above the ground.

The survey was carried out with a sound level meter, complying with IEC 651 standard, class 1 and the result of the assessment was lower than the minimum limit of action required by the regulations in force.

3.3 Residual risks



The use of the lifting platform is the absolute prerogative of professional operators and specialized technicians, in compliance with the requirements of Machinery Directive 2006/42/ EC and subsequent



Operators must be in full possession of all physical and mental abilities during the performance of their tasks on the machine; they must not, for example, be under the influence of sedatives, drugs or alcohol.



Before carrying out the work, the Operators must be perfectly aware of the position and operation of all the controls and specifications of the machine indicated in the "EC Use and Maintenance Manual".

It is forbidden to use the lifting platform for a purpose other than those provided by the manufacturer.

Always pay attention to the danger and/or warning signs placed on the machine or in adjacent areas.



The machine must always be operated by only one Operator placed at the safety distance allowed by the cable length of the control panel.







The operator working areas must always be kept clean and free of any oily residues to allow easy and safe passage.

The putting out of service of the protection and safety devices for protecting the operators is the sole responsibility of the Purchaser or the Machine's user.

Finally, we remind you that the handling, installation, use, maintenance and putting out of service of the machine represent a source of danger if these operations are not performed in compliance with the requirements of this Manual or without the necessary caution and attention required.

(More details regarding the Risk Assessment to be requested from the Manufacturer).

3.4 Operator protections





Before starting any type of work on the motorcycle lifting platform, the operator


must wear appropriate personal protective equipment (PPE), such as



Always wear work clothing normally used in the mechanical workshop activity.

3.5 Safety systems

The machine is equipped with a mechanical safety device (Figure 3) consisting of a mechanical safety bar for standing at the working height, with the lower stroke limitation made by lock blocks welded to the lower base.

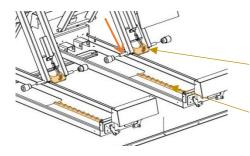

mobile anchoring bar with automatic coupling that prevents the accidental descent of the mobile surface.

mechanical safety system consisting of two toothed bars firmly welded to the base

Figure 3 - Mechanical stop system



The operations of ascent/descent, safety release and immediate stop in case of an emergency are carried out by means of the lifting platform control unit (Figure 4A).

The detail circled in blue indicates the casing that allows the replacement of the oil plug specific for transport with that of normal operation provided







The lifting piston has a parachute valve that locks the cylinder in case the oil cable is blanked.

In order to make the machine safe during the ascent phase:

- 1- Allow the anchoring bar to move freely around the perimeter of the toothed bar on the base;
- 2- Raise the lift to the desired height and hook it onto the first tooth of the toothed har

In order to make the machine safe during the descent phase:

- 1- Press the GREEN button (safety bar) on the control unit, which will automatically deactivate the safety devices, thus allowing the maneuver to lower the lifting platform.
- 2- If the system is brought to the lower stroke (therefore in a position of minimum height), release the GREEN button that will automatically unhook the bar to allow the ascent; otherwise, select the chosen position to hook the bar which will act as a mechanical stop in case of an uncontrolled fall of the structure.



ALWAYS keep the mechanical lock hooked during work, in order to weigh down the weight of the structure and of the vehicle standing on it even on the toothed bar of the base.

During the use of the lifting platform it is very important to pay the utmost attention to the ascent and descent maneuvers. During the ascent/descent phase the operator is required to distance from the lifting platform according to the length allowed by the control unit cable.

The personnel who is not in charge of using the lift must not pass or stand in the operating area of the motorcycle lifting platform.



The machine must always be operated by only one Operator.

WIDER 1000 Version:

Operate them manually until the two work platforms fit together. It is necessary to press the lever on the control unit (see fig.7 where the lever is identified with no. 5) which allows to release the wheels on the platform and therefore the possibility to couple them. Once the platforms fit together it is necessary and essential to couple them using hooks that are both in the front and rear part of the surface (see figure 5)



Once the motorcycle is loaded on the lifting platform, place it in a vise or use the rear kickstand, then fasten it firmly to the openings and the wheel lock by using a belt.









WIDER 1000 and DUO 1000 versions:



Once the vehicle is on the lifting platform, make sure to fully lock the front and rear wheels with the wheel locks.



GIVEN THE BEARING VALUE INDICATED ON THE PLATE:
Do not exceed the load capacity of the lifting
platform; Use it only to lift objects;
Do not modify the lifting platform;
The load must always remain firm and stable.

3.6 Pictograms



Danger of crushing hands with the lifting platform arms.



When the platform is at the desired height, insert the locking bar to prevent it from falling down accidentally.



Load the vehicle only when the platform is completely lowered; Before lifting it, make sure that nothing is supported by the ramp; Do not lean the rear wheel of the vehicle on the ramp during and after lifting.





4 Same Transport and handling section

4.1 Transport, handling and storage



CAUTION: Disseminate the instructions described in this chapter to all personnel involved in the transport and handling of the machine.

For safety reasons, the moving parts must be locked before transport.

4.2 Packaging and transport

The machine is packed for transport directly from the Manufacturer.

It is supplied inside a wooden case. In addition to the lifting platform, the package consists of removable ascent ramps for DUO 1000 model DL-003 (Figure 5, [1]) and fixed ramps for Wider 1000 WD_003 with hooks to couple the ramps for WIDER 1000 (circled in orange) and the two fixed wheel locks(Figure 5, [2]).

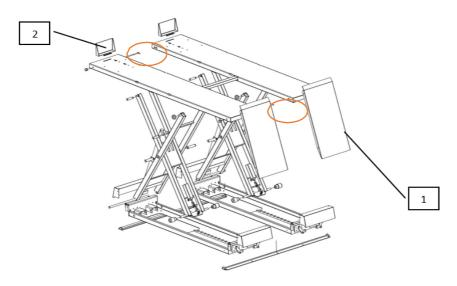


Figure 5 - Lifting platform model

The machine is tested and in perfect condition

4.3 Unloading and handling

All lifting and unloading operations must be carried out in compliance with current safety regulations.

The cardboard and wooden packagings must be lifted using a forklift truck, by inserting the forks inside the wooden supports.











It is recommended that the unloading or handling operations to be carried out with a forklift truck by a single Operator equipped with workshop gloves, safety footwear and protective helmet, as required by current regulations.



This Operator must pay maximum attention to all transport phases.

Do not allow any other person to stand in the operation area of the forklift truck in order to prevent the accidental fall of the boxes.

During the unloading phase, in any case, pay attention to the vehicles and people in transit.

Make sure there are not many holes in the floor or on the high slope ramps for the vehicle used, in relation to the load carried; always proceed at low speed with the means of transport. The unloading from the wooden pallet of the cardboard packaging containing the lifting bench, carried out manually by no less than four Operators equipped with workshop gloves, must be done near the location where the machine will be installed.

4.4 Receipt and check

The packaging is made of suitable material and is carried out by expert personnel, but during the journey it is possible to be deteriorated or damaged.

Upon receipt of the machine, immediately check if the packages are clearly damaged. If so, accept the goods with reserve, by making photographic evidence of any damage.

Open the box by cutting the clips and the closing adhesive tape.

Make sure all the material shown on the delivery note is actually present.

Make sure the parts of the machine have not been damaged during transport and notify, within 5 days of receipt, any damage to the Carrier by REGISTERED LETTER (and notify Bike Lift Europe s.r.l.), by presenting photographically documented evidence.

4.5 Storage

Pending to be unpacked and installed, the machine must be stored in a suitable environment in order not to alter its operation.

- Store the packed machine in a closed or covered area above the ground by using sleepers or similar objects.
- Room temperature and humidity: -5°/75 ° C Relative humidity between 30% and 90%.
- Do not overturn the packaging.
- If the machine is stored without packaging, it must be positioned firmly on wooden sleepers and covered with a cloth.
- Do not stack anything on the machine.







5 **■** Installation section

The machine must be installed in compliance with the safety regulations and instructions included in this chapter.



CAUTION: COMPLETELY remove the wooden sleepers located under the lifting platform by removing the fixing screws before using the machine.

The machine does not need a basis, but requires a flat and horizontal floor. The floor must be able to support a minimum weight of 1000 kg/m2•

The lifting platform must be placed in such a way as to allow the Operator to easily repair the loaded vehicles.

The lifting platform must therefore be installed by taking into account the minimum distances from walls or other possible boundaries (boundaries are imaginary lines that delimit the work or safety areas of other machines or structures).

The ascent/descent ramp must be positioned so that the vehicle can be easily lifted. The ramp must not be directed towards an obstacle that is too close to the vehicle lifting platform.



WARNING: It is absolutely forbidden to position the lifting platform on bumpy or inclined ground.

Bring the machine to the place of installation by using a mechanical lift, unpack it and place it in the chosen area.

To install the machine, fix it to the floor with 4 dowels M10 x 100 mm, using the appropriate holes (used to fix the sleepers).

5.1 Power

- Electric pump Connect the electric cable to the power grid using the plug (not supplied), according to the regulations in force in the Country of use. The socket must be grounded.
- Compressed air hose for handling the wheel safety locks for Wider 1000 model WD-003

TECHNICAL DATA OF THE ELECTRIC MOTOR:

Use voltage: 220/230 V. Frequency: 50 Hz. Absorbed power: 1kW Use

voltage: 110/115 V. Frequency: 60Hz. Absorbed power: 1kW











WARNING: In the electronic or electro-hydraulic version, the lifting platform is equipped with an electronic board that transforms the low-voltage current (to prevent the electrocution risk. A fuse calibrated on the amperage of the stable 230V power supply is located inside this board.



It is forbidden to replace/tamper with this fuse with one of a higher resistance/amperage

5.2 Putting into service

The tests to be carried out before using the machine have the task of verifying that the mechanical and electrical installation (in the electro-hydraulic pump versions) has been carried out correctly and there are no breakages or damages that could compromise the proper functioning and the performance of the machine.

Make sure:

- There are no signs of obvious breakage or damage to the mechanical structures;
- The mechanical safeties previously described are functioning;
- The connecting pipe between the pump and the hydraulic cylinder does not have any cracks and is in good condition;
- All the seegers placed on the pins are installed correctly
- The transport oil plug must be replaced with the vented one for normal operation (see NOTE PAGE 32)

In the versions equipped with electro-hydraulic pump, also check that:

- The electric cable and plug protections (not supplied, but to be installed by the User in compliance with the Country's regulations) are in perfect condition;
- The power plug is properly inserted in the socket;
- The electrical power wiring between the pump and the socket is well positioned, not twisted, does not interact with the passage routes or the storage spaces and does not interfere with other machineries;
- The connection to the electrical system is suitable for power and amperage in order to power the electro-hydraulic pump (refer to the data on the plate shown on the lifting platform).

Carry out the connection following the instructions contained in the manual supplied with the pumps



The detail circled in blue indicates the casing that allows the replacement of the oil plug specific for transport (to prevent spillage) with that of normal operation provided







6.1 Dismantling

Follow the Regulations regarding the materials dismantling in force in the country where the machine will be dismantled.

Here are some useful indications in case you must disassemble the machine to reassemble it in other areas, store it or demolish it.

6.2 Mechanical dismantling

Before proceeding with mechanical dismantling of the machine, carefully clean the whole structure (see **Cleaning and Maintenance**).

Before removing the machine from its housing, remove all moving parts by proceeding to the opposite of what is described in the **Installation** chapter.

For the lifting modes and the relative specific safety precautions, refer to the **Transport**, **Handling and Storage** chapter.

6.3 Scrapping

The dismantling operations of the machine must be carried out in total safety by using the protections.

At the end of the machine's life it is necessary to proceed to the proper dismantling of the components that are listed with reference to the interested party:

Support structure: Fe 360/S235Hydraulic cylinder: Fe 360/S235

Paint: Epoxy powder

Gaskets: Polyurethane rubberOil: Hydraulic ISO VG 10 (W32)

Demolish the different types of machine components in appropriate landfills. Always comply with the Legislation in force in the Country where the machine is used.





7 🤏 Operation section

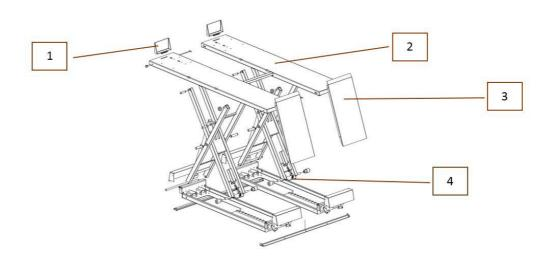


Figure 6 — general model of a lifting platform

7.1 Loading operations

Before installing the vehicle on the platform it is essential to use the wheel lock (Figure 6, [1]), to check that the work surface (Figure 6, [2]) is **completely lowered** and the ascent ramp (Figure 6, [3]) is properly positioned.

1 - Load the vehicle on the work surface [2], by passing it on the ascent ramp [3]; 2 - In case of a motorcycle: Put the motorcycle on its center kickstand (if it does not have a central kickstand, use one of our rear stands). **Do not lift the motorcycle leaning on**

WARNING: Never lift the load before making sure it is firmly fastened to the platform with belts .

the side kickstand; tie the motorcycle with the belts (available on request) to make it more stable.



Always check during lifting that the load does not slope and unbalance; During the ascent/descent phase the operator is required to distance from the lifting platform according to the length allowed by the control panel cable.

- 3- Proceed with the lifting operation of the structure;
- 4- Once the working height has been reached, slightly lower the lifting platform in order to make sure that the safety bar (Figure 6, [4]) is leaning against the stop locks; otherwise, continue the ascent until the bar exceeds the stop locks located at the base of the lift for the chosen working height.

If the DUO 1000 model DL-003 is used, it is possible to remove the ascent ramps (since WIDER 1000 model WD-003 lift has fixed ramps that cannot be removed from the loading/working platform) to allow operator to work without

interference even in the rear side of the motorcycle.









ATTENTION: Do not operate without the safety bar.

7.2 Unloading operations

- 1- Reassemble the ramps if you are using the DUO 1000 model DL- 003 lifting platform; on the contrary WIDER 1000 model WD-003 lift has fixed ramps that cannot be removed from the loading/working platform;
- 2- Make sure that the scissor sliding guides are free from foreign bodies (bolts or other objects would stop the descent and could cause serious damage or dangerous jolts);
- 3- Use the pump to raise the lifting platform with about 3 cm then release the safety bar (Figure 6, [3]) by pressing the GREEN button on the control unit to activate the descent control (DOWN);
- 4- Remove any locking systems and lower the vehicle using the brakes to stop the stroke
- 5- Additional hydraulic jack



It is absolutely forbidden to lift motorcycles while leaning on the side kickstand Do not try to lift motor vehicles weighing more than the maximum capacity of the platform.

Do not stand under the vehicle during maintenance phases.








7.3 Lifting types

7.3.1 Control unit

Lifting is carried out by using the buttons on the lifting platform control unit.



1)ascent _UP 2)
descent _DOWN

- 3) safety bars release _SAFETY BAR 4) emergency stop_ STOP
- 5) lever (present only in the control unit of WIDER 1000 MODEL WD-003)
- 6) casing that allows the replacement of the oil plug (action to be performed immediately from the first use) specific for transport with the vented one supplied for normal operation

Figure 7- ascent/descent control unit, safety bar hook, emergency stop

The control unit is equipped with four buttons that allow:

1)the ascent 2) the descent both the controls work by pressing and holding the button 3) the release of the safety bar 4) fast emergency stop by pressing the button





8 🕻 Maintenance sectio



The maintenance operations are the absolute prerogative of professional operators and specialized technicians, in compliance with the requirements of Machinery Directive 2006/42/ EC and subsequent updates.

As routine maintenance, the following checks/operations must be carried out **once a month**:

- Visually check the entire machine to make sure that the structures are not deformed or cracked.
- Check the weldings and the proper functioning of the safety devices.
- Make sure the machine ascends and descends smoothly.
- Check that the connecting pipe between the pump and the hydraulic cylinder does not have cracks or unusual deformations, otherwise replace it by following the installation operations of the pump ("Putting into service").
- If necessary, add hydraulic oil to the pump by using the special level plug. Use MOTOREX COREX HLF-D 32 hydraulic oil or equivalents.

8.1 Lubrication

Check and grease the scissor sliding guides frequently.

Lubricate the pins and moving parts at least once a month. In case of continuous use, lubricate every 15 days.

8.2 Bleeding of the hydraulic circuit

To carry out the bleeding of the hydraulic circuit follow the steps:

- 1- Raise the platform using the ascent button to the maximum mechanical safety position;
- 2- Remove the safety bar, then use the descent button to lower the platform;
- 3- Repeat the operations from points 1) and 2) a few times to eliminate any air bubbles in the hydraulic circuit.

Once performing these operations, the platform will ascent properly. If, after performing the previous operations, the platform does not lift properly, repeat the operations from points 1) and 2).





8.3 Piston replacement

In case the hydraulic pistons must be replaced, proceed as follows:

- 1- Lower the lifting platform to the minimum height position while pressing and holding the descent button on the control unit (down)
- 2- Maintain the lowering control of the lift for another 6 seconds, to empty the oil;
- 3- A second operator must lift the lifting platform by hand up to about 500 mm from the ground; the fall protection device (once the lift has been brought to the minimum height) will be unhooked and will be able to fit inside the nearest pawl;
- 4- The pistons are empty, so they can be disassembled by unscrewing the support screws, the pin (top) and the oil tube (bottom):



Figure 8 - hydraulic pistons

- 5- The pistons are replaced by tightening the screws and pin and reconnecting them with the hydraulic circuit;
- 6- Keep the ascent button pressed for as long as necessary for the pistons to re-fill and start the lifting operation;
- 7- Then proceed with the operation of bleeding the hydraulic circuit (Paragraph 8.2)

Piston maintenance:

It is recommended to consider the following aspects:

- The results of the checks and maintenance must be planned and recorded
- Check the oil leaks from the oil nozzle and/or leaks on the heads
- Set the lubrication intervals for spherical joints, supports and all components that are not self-lubricated
- The stem must always be retracted during long-lasting machine downtime









8.4 Cleaning

8.4.1 Initial cleaning

The machine does not require particular initial cleaning, but it is a good practice to clean the transit areas of the motorcycles by removing the oils and dust to prevent the slip during loading.



Wear water-repellent gloves. Perform the cleaning operations wearing anti-cut gloves resistant to the substances used (follow the safety data sheet).



WARNING: Make sure there are no foreign bodies inside the lifting platform and especially in the sliding guides of the shears and on the rack (6) where the safety bar operates.



ATTENTION: Any cleaning and maintenance operation must be carried out with the safety bar inserted.

Keep the operator's work area clean.

The cleaning operations concern:

- The machine in general;
- The operator's standing areas.

Dispose the liquids and consumables used in the appropriate landfills, according to the legislation of the Country.

The cleaning of the lifting platform can be carried out by personnel without specific technical skills, who however knows the main characteristics of the machine in order to avoid dangerous situations.

8.4.2 General cleaning of the machine

Perform the general cleaning of the machine weekly with the utmost care.

Remove foreign substances: you can use non-corrosive detergents for ferrous and rubber material. These detergents must not be harmful to the operator (follow the instructions contained in the safety data sheets of the substances used, also for the selection of personal protective equipment worn by the operator during work).











The use of water jets and flammable liquids is FORBIDDEN.



The use of self-cleaning cloths is recommended.

The support surfaces and locking blocks of the safety bar must be carefully cleaned to remove traces of oil or grease.

8.4.3 Cleaning the work areas

Keep the work area clear of any material that may hinder the operations of the employees.

Keep the surrounding areas clean; in particular from oil, grease, etc. that can make the floor slippery.

Use suitable vacuum cleaners and proper equipment.

8.5 Problems and remedies

The most common problems encountered during the work, the probable causes that determine them and the possible remedies to be taken to eliminate them are listed below.


When implementing the suggested remedy, always follow the instructions described in the Instructions to which the remedy refers.

Bike-Lift Europe s.r.l. will solve all the problems that cannot be eliminated by means of the attached instructions.

The control unit hosts the motor (Figure 9) that activates and moves the platform.



Figure 9 — control unit







ELECTRIC PUMP

PROBLEM	PROBABLE CAUSE	REMEDY
The lifting platform during the ascent and/or descent vibrates excessively or	Air present in the Hydraulic circuit.	It is necessary to bleed the hydraulic circuit by lifting and lowering the lifting platform a few times.
The lift climbs slowly and with difficulty	Oil too viscous	If the air temperature falls below -6°/-10° C, the oil decreases its fluidity. To solve this problem, lift and lower the lift a few times so that the oil increases its temperature.
Operating on the button panel, the motor runs but the	Oil level in the pump too low.	Remove the casing of the pump and check the oil level through the plug (Figure 10). If the level is too low, add ISO VG 10 hydraulic oil.
lift does not rise.	Hydraulic pump problems	Contact the dealer or Bike-Lift-Europe s.r.l.;
	The emergency stop (red button in case of the built-in lifting platform version) on the button panel is inserted	Release the red button on the button panel by turning it clockwise.
Operating on the button panel the	No voltage	Check the mains connection plug
motor does not run	Improper operation of the button unit on the button panel	Replace the button unit
	The motor is short-circuited	Contact the dealer or Bike-Lift-Europe s.r.l.;



PROBLEM	PROBABLE CAUSE	REMEDY
	The emergency stop (red button in case of the built-in lifting platform version) on the button panel is inserted	Release the red button on the button panel by turning it clockwise
Operating on the button panel the lifting	No voltage	Check the mains connection plug
platform does not descend	Improper operation of the button unit on the button panel	Replace the button unit
	Problems with the solenoid valve which controls the descent of the pump	Replace the solenoid valve (Figure 10)

IN CASE OF POWER FAILURE, USE THE SAFETY VALVE WHICH CAN BE OPERATED MANUALLY BY TURNING IT COUNTERCLOCKWISE TO ALLOW THE DESCENT OF THE LIFTING PLATFORM.

Oil plug



Figure 10 — electric motor

Solenoid valve



VALVOLA·DI·SICUREZZA·

FROM THE FIRST USE OF THE LIFTING PLATFORM IT IS MANDATORY TO REPLACE THE PLUG USED IN THE TRANSPORT PHASE WITH THE VENTED ONE SUPPLIED







9 **%** Accessories

WIDER 1000

BASIC EQUIPMENT	
PARAMETER	VALUE
Wheel lock bar	2 pcs
Ascent ramp	2 pcs

DUO 1000

BASIC EQUIPMENT	
PARAMETER	VALUE
Wheel lock bar	2 pcs
Ascent ramp	2 pcs



 ϵ





NOTES	

((





NOTES







N	0	T	ES
IN	U	I	£5

((





SPARE PARTS - TECHNICAL DRAWINGS

9.1 WIDER 1000

((





9.2 DUO 1000

